

KYOCERA Wireless Corp.



Position Location RF Hardware

TECH3300GPS - Based on 7GP



Common IF Frequency Plan

- Uses a fixed receive IF of 183.6MHz for all modes and bands including GPS
- Requires high side LO injection for Cellular and PCS bands
- Requires low side LO injection for GPS reception on 1575.42MHz
- Current phone designs use a dual band oscillator for Cellular and PCS
 - Adding GPS functionality to the phone would normally involve a 3rd UHF_LO and thus add directly to the cost.




Common IF Frequency Plan

- To avoid the expense of a 3rd LO Technology has demonstrated that it is feasible to use a $/2$ function to generate the Cellular LO from the PCS LO signal.
 - Specifically the MAXIM 2338 has undergone extensive tests to verify its conformance (Complete data to be posted on SEEK)
- Thus only a dual band VCO is required to cover Cell / PCS and GPS operation
 - This VCO module has been developed in conjunction with FMD is undergoing evaluation - presently we have 300 samples to hand.







Maxim WC19 Solution using IFR3000 or IFR3300

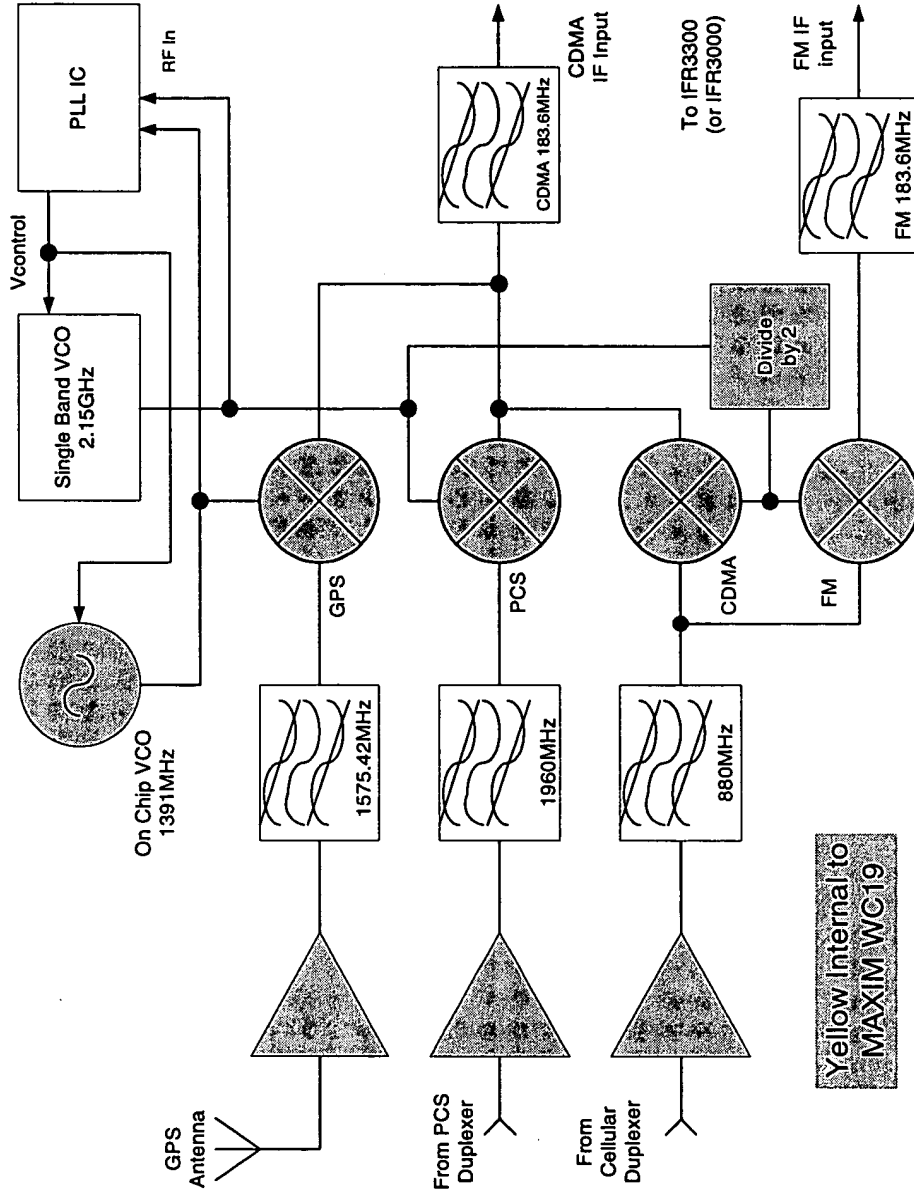

O I P E JC71
AUG 02 2004
PATENT & TRADEMARK OFFICE
*Single band only
2.15GHz*



Maxim 2338 Hybrid Solution using IFR3000 or IFR3300

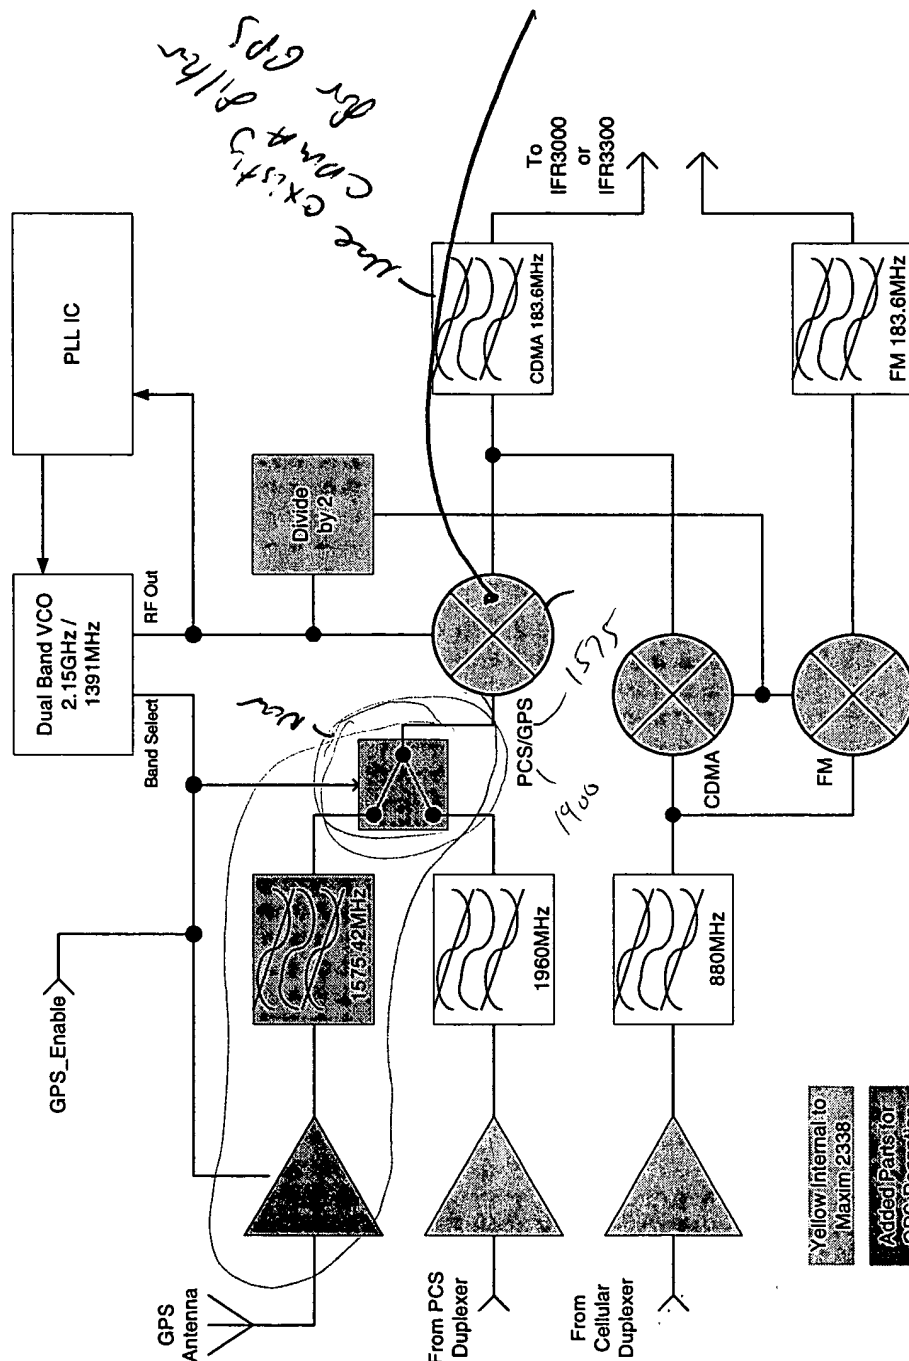

GPS B.R.
CDMA

1.024 MBS
1.228 MBS



How's it working ?

- Stop Press !
 - Thanks to the outstanding work of the software team, TECH3300GPS is successfully making calls and receiving GPS test signals.
 - TECH3300GPS will be under going further evaluation in QCT's test facility next week.
 - Shortly thereafter fields trials and data analysis

